Circuit Breaker for Equipment thermal-magnetic, Flange type, Reset type, Screw terminals



See below:

Approvals and Compliances

Description

- Flange type
- TMF12-211 Thermal-magnetic circuit breaker
- 1-pole
- Reset type
- Insensitive to shock or vibration
- Bolts and nuts

Unique Selling Proposition

- Tripping characteristic Fast or Slow
- Positively trip-free release
- Available with cover
- Different mounting possibilities

Applications

- Power supplies
- Uninterruptible power supply
- Power tools
- Household appliances

References

Weblinks

pdf data sheet, html datasheet, General Product Information, Distributor-Stock-Check, Detailed request for product, Product News

Technical Data

Rated Voltage AC	AC 240 VAC
Rated Voltage DC	28 VDC
Rated current range AC	0.05 - 15 A, see approbations
Conditional short circuit capacity Inc	IEC 60934: PC1, AC 240 V: 1 kA
Short circuit capacity Icn	IEC 60934: AC 240 V : 200 A
	AC/DC 28 V : 400 A
Degree of Protection	front side IP40 acc. to IEC 60529
Dielectric Strength	50 Hz: > 1.5 kV
	Impulse 1.2/50 µs: > 2.5 kV
Insulation Resistance	$500\text{VDC} > 100\text{M}\Omega$
Endurance typical	2 x lr: 5000 switching cycles
Endurance minimum	Reset type AC: $2 \times Ir$, $\cos \varphi$ 0.6: DC: $2 \times Ir$, $L/R = 2 - 3$ ms: 50 switching cycles

Overload	IEC: min. 40 trips
	@ 6 x lr, cos φ 0.6
	UL / CSA: min. 50 trips
	@ 1.5 x lr, cos φ 0.75
Allowable Operation Temp.	-5°C to 60°C
Vibration Resistance	± 1.5 mm @ 10 - 60 Hz
	acc. to IEC 60068-2-6, test Fc
	10 G @ 60 - 500 Hz
	acc. to IEC 60068-2-6, test Fc
Shock Resistance	100 G / 6ms
	acc. to IEC 60068-2-27, test Ea
Tripping Type	Thermal-Magnetic
Actuation Type	Reset type
Weight	ca. 10 g

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: TM12

Approval Logo	Certificates	Certification Body	Description
_OVE	VDE Approvals	VDE	VDE Certificate Number: 99673
c SU °us	UL Approvals	UL	UR File Number: E71572
®	CSA Approvals	CSA	CSA Certification Record: LR 37712
(11)	CCC Approvals	ccc	CCC Certificate Number: 2020970307003504

Product standards

Product standards that are referenced

Organization	Design	Standard	Description
<u>IEC</u>	Designed according to	IEC 60934	Circuit-breakers for equipment (CBE)
(UL)	Designed according to	UL 1077	Standard for Supplementary Protectors for Use in Electrical Equipment
(W)	Designed according to	GB 17701	Circuit-breaker for equipment

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
<u>IEC</u>	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements


Compliances


The product complies with following Guide Lines


Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
50	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


Dimension [mm]


TMx12-112















Installation from rear


Installation from front

Diagrams

TM12-...









TM12-...S

TM12-...SN





Approval		Main circuit Rated current	Rated Voltage AC	Rated Voltage DC	Auxiliary circuit Rated current	Rated Voltage AC	Rated Voltage DC
c FL °us	UL 1077 CSA C22.2 No. 235	0.0515 A	240 V	28 V	2 A 3 A	120 V	- 28 V
(P)	CSA C22.2 No. 235	0.0516 A	240 V	28 V	1 A	240 V	-
D VE DVE	EN 60934	0.0516 A	240 V	28 V	1 A	240 V	28 V
(W)	GB 17701	0.0516 A	240 V	28 V	1 A	240 V	28 V

Typical internal resistance TMF12

Rated Current [A]	Internal Resistance [Ω]
0.05	335.00
0.50	4.37
1.00	1.23
2.00	0.369
3.00	0.181
4.00	0.097
5.00	0.055
6.00	0.044
7.00	0.0231
8.00	0.0227
9.00	0.0142
10.00	0.0123
11.00	0.012
12.00	0.012
13.00	0.0108
14.00	0.0091
15.00	0.0089
16.00	0.0071

Typical internal resistance TMT12

Rated Current [A]	Internal Resistance [Ω]
0.05	260.00
0.50	4.03
1.00	1.006
2.00	0.323
3.00	0.161
4.00	0.086
5.00	0.0494
6.00	0.0396
7.00	0.0257
8.00	0.0249
9.00	0.0129
10.00	0.0112
11.00	0.0111
12.00	0.0111
13.00	0.0109
14.00	0.0092
15.00	0.0090
16.00	0.0075

Effect of ambient temperature

The units are calibrated for an ambient temperature of +23°C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

Ambient Temperature [°C]	Correction factor
-5	0.87
0	0.90
10	0.95
23	1.00
30	1.05
40	1.12
50	1.20
60	1.30

Example: Rated current = 5 A, Environmental temperature = 50 °C, --> Correction factor = 1.2, Resulting current = 6.0 A


Configuration key N

Configuration key R

Configuration key 0.05 0.1 0.15 0.2 0.3 0.4 0.5 0.6 0.7 0.8 0.9 1 1.1 1.2

1.3

Time-Current-Curves

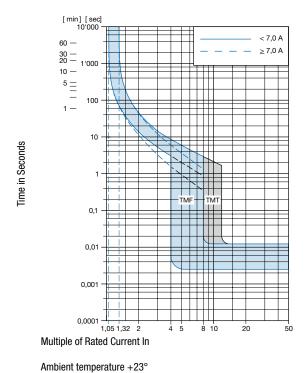

Config. Code

TM F 12 - 1 2 3 A B C - 1.23

The characters are placeholders for the correspondingly keys of selections from the key tables.

TM F 12 - 1 2 3 A B C - 1.23 = Magnetic release range		Shunt terminal	
Magnetic release range	Configuration key	Shunt terminal	
Fast	F	TM F 12 - 1 2 3 A B \boldsymbol{C} - 1.23 = Setting indication	
Slow	T	Setting indication	
TM F 12 - 1 2 3 A B C - 1.23 = Mounting		Setting indication	
Mounting	Configuration key	TM F 12 - 1 2 3 A B C - 1.23 = Rated current	
Screwflange mounting	1	Rated current	
TM F 12 - 1 2 3 A B C - 1.23 = Actuation Type		0.05 A	
Actuation Type	Configuration	0.1 A	
k		0.15 A	
Reset type	1	0.2 A	
TM F 12 - 1 2 3 A B C - 1.23 = Terminal		0.3 A	
		0.4 A	
Terminal	Configuration key	0.5 A	
Screw clamp terminals	2	0.6 A	
		0.7 A	
TM F 12 - 1 2 3 A B C - 1.23 = Auxiliary contact		0.8 A	
Auxiliary contact	Configuration	0.9 A	
, takinary contact	key	1.0	
Auxiliary contact	S	1.1 A	
TM F 40 4 0 0 A D O 4 00 Chunt to mained		1.2 A	
TM F 12 - 1 2 3 A B C - 1.23 = Shunt terminal		1.3 A	

Rated current	Configuration key	Rated current	Configuration key
1.4 A	1.4	5.0 A	5
1.5 A	1.5	5.5 A	5.5
1.6 A	1.6	6.0	6
1.7 A	1.7	6.5 A	6.5
1.8 A	1.8	7.0 A	7
1.9 A	1.9	7.5 A	7.5
2.0 A	2	8.0 A	8
2.1 A	2.1	8.5 A	8.5
2.3 A	2.3	9.0 A	9
2.5 A	2.5	9.5 A	9.5
2.8 A	2.8	10.0 A	10
3.0 A	3	11.0 A	11
3.3 A	3.3	12.0 A	12
3.5 A	3.5	13.0 A	13
4.0 A	4	14.0 A	14
4.5 A	4.5	15.0 A	15
Other rated currents on request		16.0 A	16
		Other rated currents on request	

Variants

Rated Current [A]		Construction variants		Config. Code	Order Number
	Auxiliary contact	Shunt terminal	Setting indication		
6				TMT12-112-6	4410.0749

Availability for all products can be searched real-time: https://www.schurter.com/en/info-center/supporttools/stock-check-distributors

Packaging Unit	20 Pcs		
----------------	--------	--	--